


Technical specifications




MANUFACTURING BEYOND OPTIMIZATION

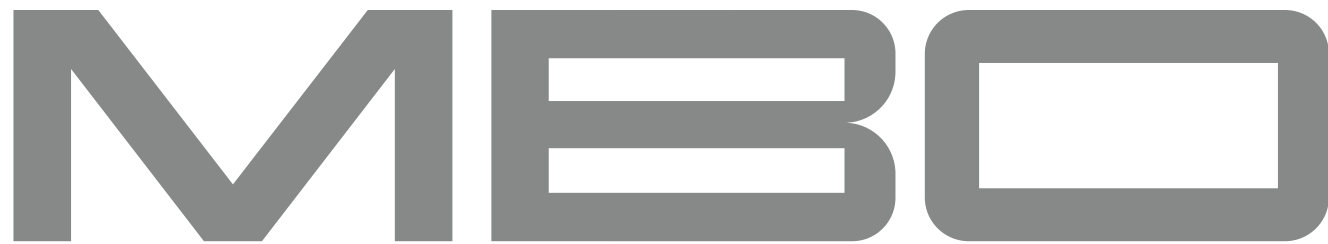

TECHNICAL SPECIFICATIONS		K8RS – FP (Palletized feeder)		Cross fold		Three-fold	
		mm	inch	mm	inch	mm	inch
Pile height	max.	1,300	51 1/4	–		–	
Infeed width	min.	250	9 3/4	150	6	150	6
	max.	780	30 1/2	780	30 1/2	530	20 6/7
Infeed length	min.	250 (170 ¹)	9 3/4 (6 3/4 ¹)	100	4	100	4
	max.	1,200	47 1/4	530	20 6/7	390	15 1/4
Folding length	min.	60	2 3/8	–		–	
Number of buckle plates		4 or 6		1		0 or 1	
Fold roller diameter		43.7	1 3/4	43.7	1 3/4	43.7	1 3/4
Slitter shaft diameter		35.0	1 3/8	35.0	1 3/8	35.0	1 3/8
Product thickness at exit (thicker on request)	max.	2.0	5/64	2.8	3/32	3.0	1/8
Speed	min.	30 m/min (98 fpm)					
	max.	275 m/min (902 fpm)					
Electrical supply	M1 Advanced 3 x 400 V 50/60 Hz 3 x 220 V 50/60 Hz	9.3 kVA max. 63 A		–		–	
Compressed air supply		16 m³/h 6 bar					

Measurements: $\frac{\text{mm}}{\text{inch}}$

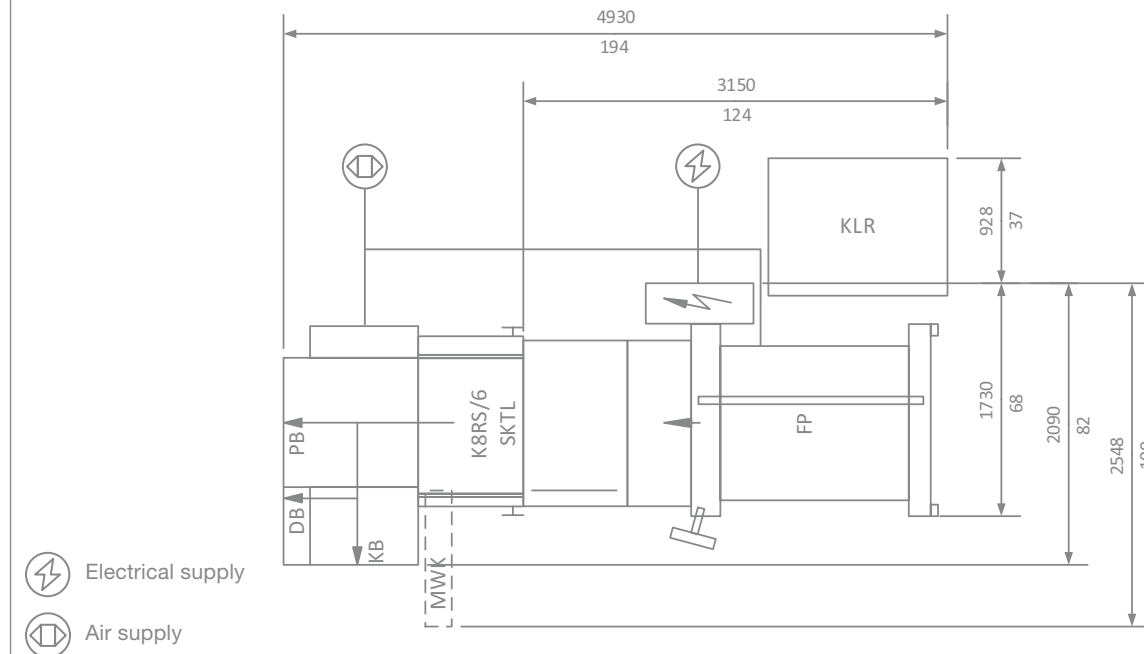

INFO@MBO-PPS.COM

05/2024_v1

MANUFACTURING BEYOND OPTIMIZATION

